


Nylon prefilter

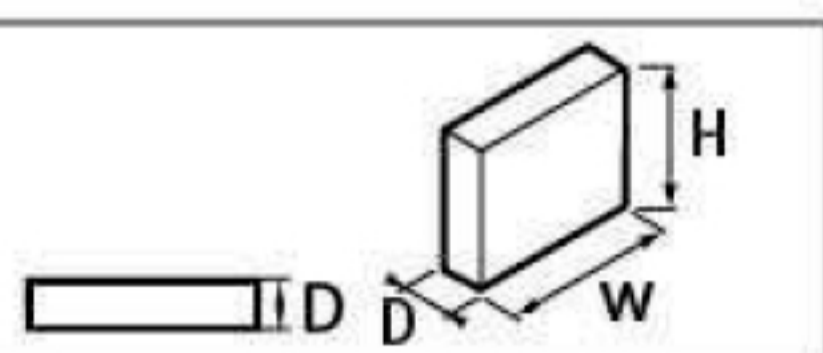

Material And Operation Conditions

Media	Black nylon nets
Frame	Aluminium/Galvanized steel/Stainless steel
Max. Temperature	80°C
Max. Humidity	100%
Optional aluminium	10~46mm

Product Information

Product Features:



- 1.Can choose the aluminum frame, Galvanized steel, stainless steel frame materials, with synthetic fiber materials together ammonia by acylation single fiber woven, good abrasion resistance and long service life.
- 2.Nylon nets filter air has less resistance, can repeat cleaning, long service life, the characteristics of high performance to price ratio;

Application:

Widely applied to central air conditioning, family expenses air conditioning, special acid, alkali ventilation filters and clean room air return air conditioning filter mouth.

OEM:

Customized design is available.

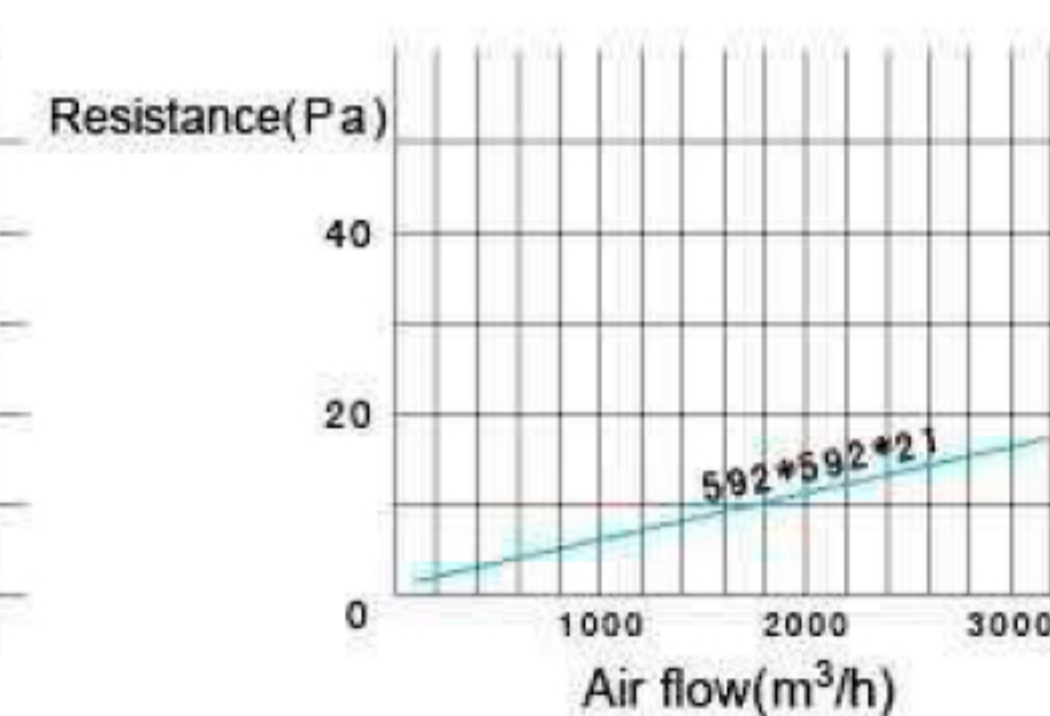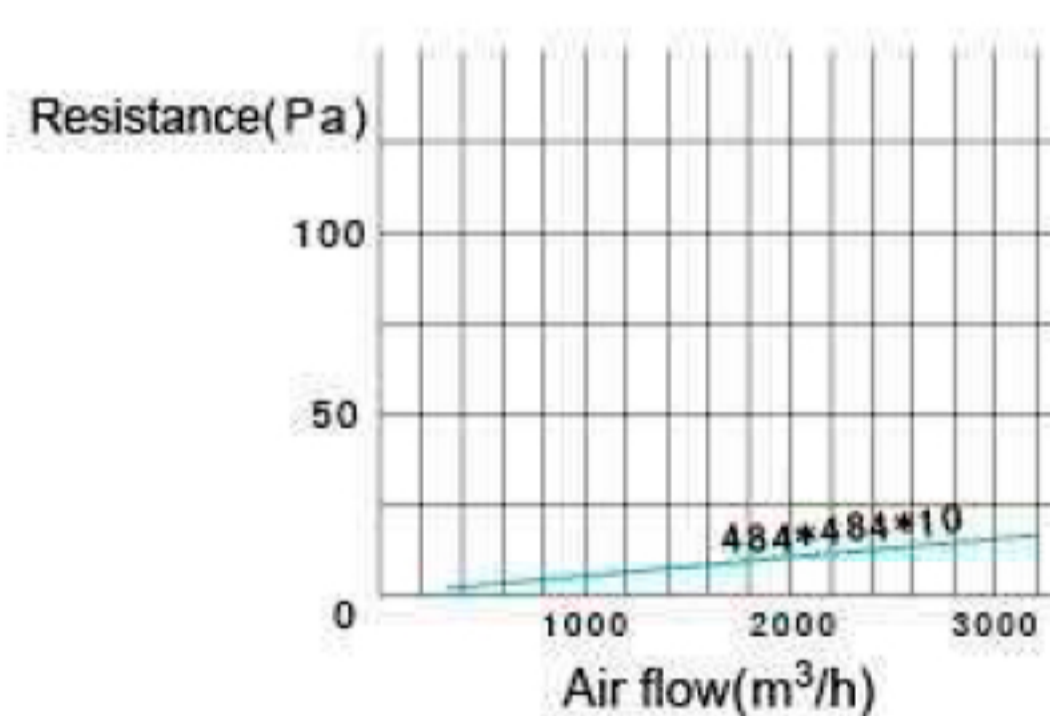

Technology Parameters

Model	Width (mm)	Height (mm)	Depth (mm)	Air flow (m ³ /h)	Initial Resistance (≤Pa)	Media area (m ²)
K418-001	592	592	10	3200	20	0.70
K418-002	592	287	10	1600	20	0.34
K418-003	592	490	10	2600	20	0.58
K418-004	592	592	21	3200	20	0.70
K418-005	592	287	21	1600	20	0.34
K418-006	592	490	21	2600	20	0.58